



YLI ELECTRONIC

Electric Bolt with Voice Prompt Function


Model: YB-700A/B(LED)-VP





Parameters

Lock Body	225Lx34Wx38H(mm)
Magnetic Plate	100Lx25Wx3H(mm)
Bolt	16mm solid 304 stainless steel
Signal Output	Lock signal: NO/NC/COM Door signal: NO/COM
Voice prompt	“The door is open” Chinese and English can be switched
Time delay	0/3/6/9 sec adjustable
Voltage	12-24VDC
Current	Start 1200mA, Standby 280mA
Feature	Fail Safe[YB-700A(LED)-VP], Fail Secure[YB-700B(LED)-VP]
LED	Light on indicates locked, light off indicates unlocked
Detection Distance	Within 8mm
Suitable for	Wooden door, meta door, fireproof door, glass door
Material	304 stainless steel, wire draw finishing
Weight	1.2 kg


Dimensions

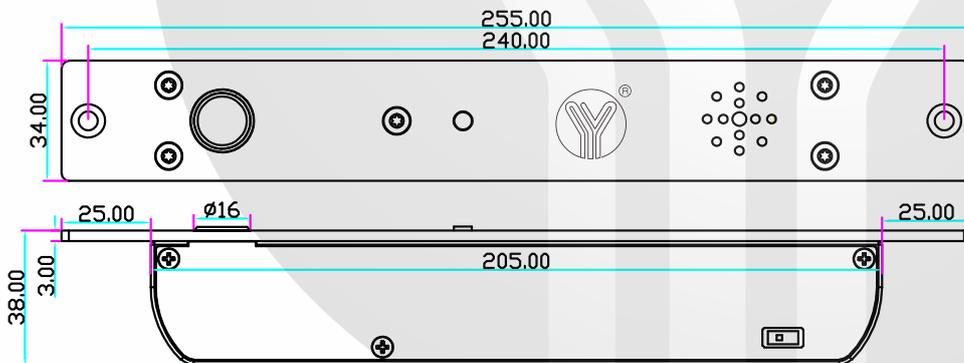

YB-700A(LED)-VP

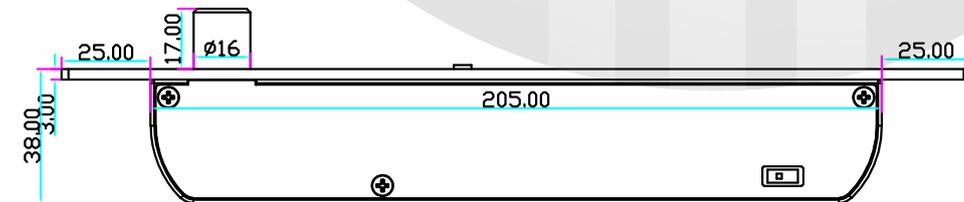


YB-700B(LED)-VP

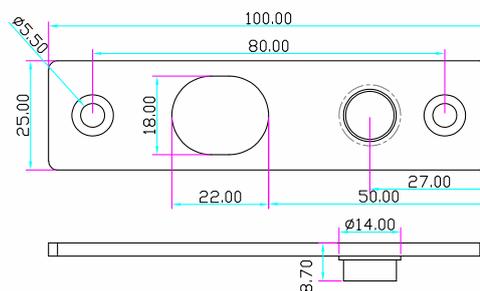

Magnetic Plate

Buzzer alarm

“The door is open” Chinese and English can be switched by dial switch
The left side is in English mode, right side is in Chinese mode.




Time Delay


Adjust the delay time for locking automatically
0/3/6/9 secs.




Wiring Diagram

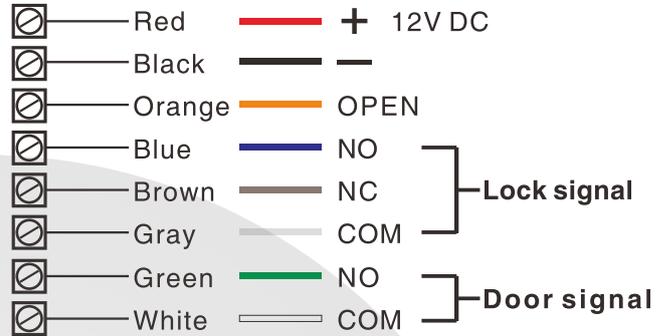


Installation Steps

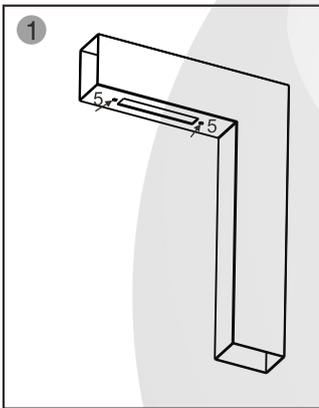


1. Inscribe the location of face plate and magnetic plate in the door leaf and door frame according to the mark of the size

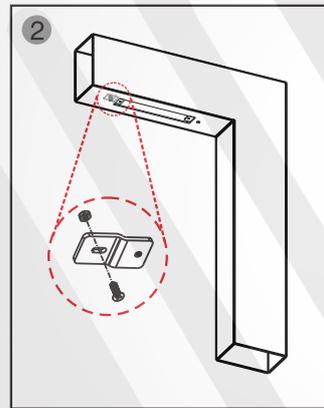

2. Mount extended slice

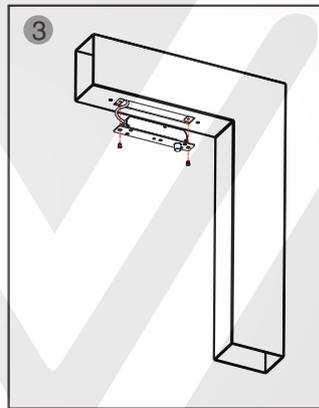

3. Connect power supply line and test

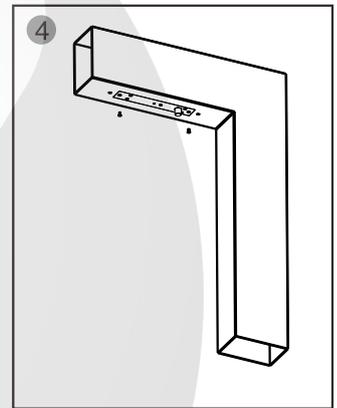

4. Tighten the screws

Installation Schematic

